




PIN BUSH TYPE COUPLING (BTC SERIES)

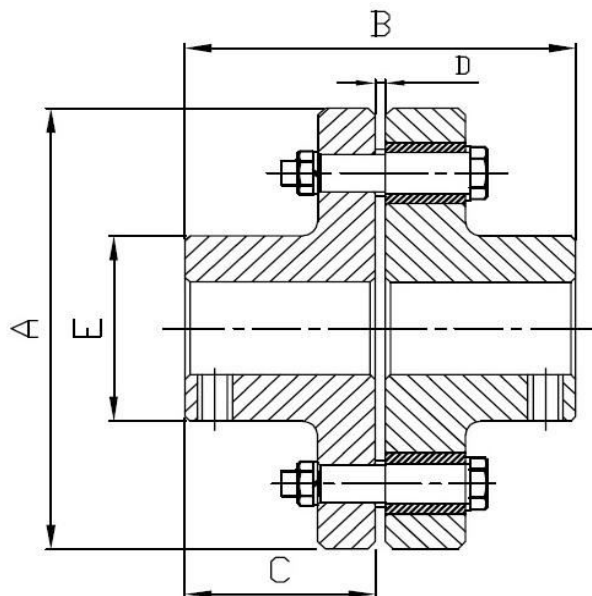

Coupling Size	No. of Pins	Torque NM	Max. Speed R.P.M	Design KW/100 R.P.M.	Bore		A	B	C	D	E
					Min	Max					
BTC-10	3	78	6050	0.82	12.7	30	95	79	38	3	44
BTC-20	4	310	5050	3.26	12.7	35	114	99	48	3	51
BTC-21	6	516	4400	5.40	16	42	130	105	51	3	67
BTC-30	4	621	3600	6.50	16	50	160	107	51	5	75
BTC-40	4	831	3000	8.70	20	70	191	125	60	5	105
BTC-41	6	1251	3000	13.10	20	70	191	125	60	5	105
BTC-50	6	1671	2500	17.50	25	80	225	157	76	5	115
BTC-60	8	2349	2300	24.60	45	95	254	183	89	5	140
BTC-61	10	2941		30.80	45	95	254	183	89	5	140
BTC-62	12	3524		36.90	45	95	254	183	89	5	140
BTC-70	12	4164	1980	45.70	60	115	290	235	115	5	175
BTC-71	14	5205	1910	54.50	60	120	300	235	115	5	185
BTC-80	16	5826	1860	61.00	65	130	310	255	125	5	200
BTC-81	18	7258	1690	76.00	65	135	340	265	130	5	205
BTC-82	12	8738	1590	91.50	70	140	360	276	135	6	212
BTC-90	13	9932	1470	104.00	80	150	390	316	155	6	225
BTC-91	15	13179	1400	138.00	90	160	410	336	165	6	240
BTC-100	16	14325	1300	150.00	100	170	440	366	180	6	255
BTC-101	17	18145	1200	190.00	110	180	480	386	190	6	270
BTC-110	20	23875	1080	250.00	120	190	530	406	200	6	285

Date: 20/07/2020