




DOUBLE ENGAGEMENT GEAR COUPLING (EXP SERIES) AGMA STANDARD

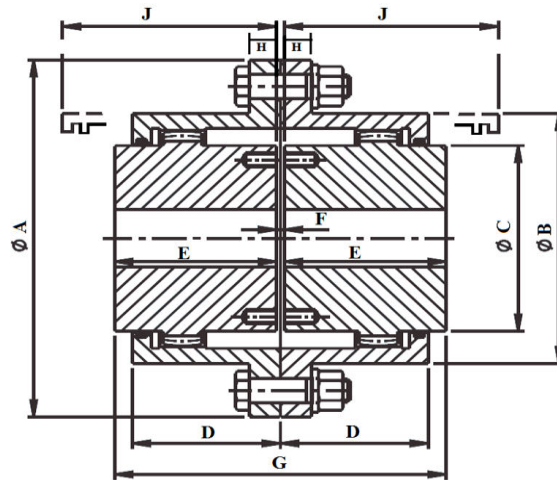

COUPLING SIZE	HP per 100 R.P.M	MAX. SPEED R.P.M	MAX. BORE	MIN. BORE	DIMENSIONS (M.M)								
					A	G	E	C	B	H	D	J	F
EXP-10	12	8000	48	13	116	89	43	70	85	15	40	50	4
EXP-15	27	6500	60	19	152	102	49	85	105	20	50	60	4
EXP-20	50	5600	73	25	178	127	62	105	125	20	60	75	5
EXP-25	90	5000	92	32	213	159	77	130	155	20	70	90	5
EXP-30	150	4400	105	38	239	187	91	150	180	20	85	105	5
EXP-35	230	3900	124	51	279	219	107	180	210	30	100	130	6
EXP-40	350	3600	146	64	318	248	121	210	245	30	110	145	6
EXP-45	480	3200	165	76	346	278	135	235	275	30	125	165	6
EXP-50	650	2900	178	89	389	314	153	255	305	40	140	185	7
EXP-55	850	2650	197	102	425	345	169	280	335	40	160	205	7
EXP-60	1100	2450	222	115	457	384	189	305	365	25	170	230	7
EXP-70	1600	2150	254	127	527	451	220	355	425	30	195	265	10