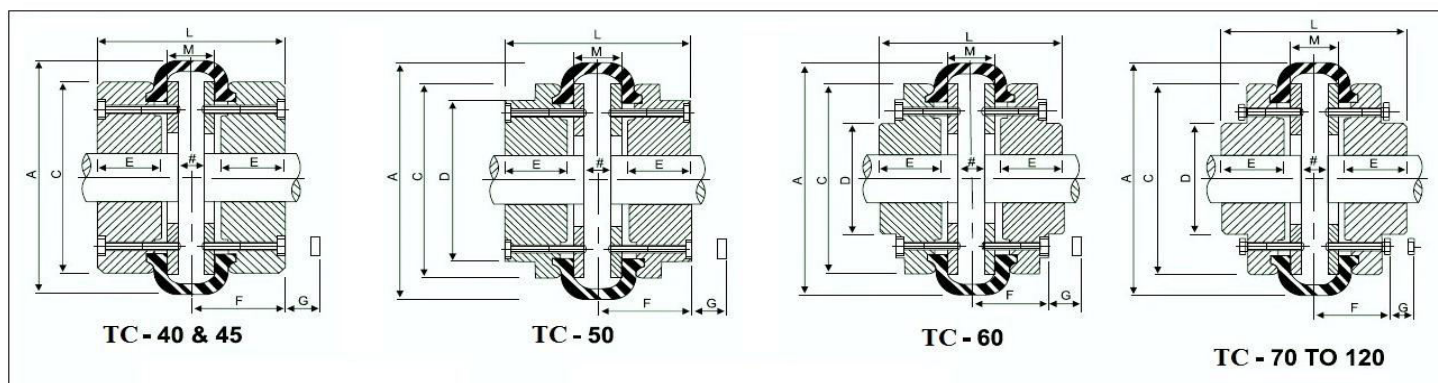


**TYRE COUPLING (TC SERIES)**

Size	K.W. Per 100 RPM	MAX Speed RPM	Bore Dia		Weight Kgs	CD ² Value Kgs. M ²	Set Screw on Key	Dimensions								No of Screw per Flange
			Max	Pilot				A	C	D	E	F	G	M	L	
TC-40	0.21	4600	30	12	1.5	0.006	M5	105	82	---	22	33	42	23	67	4
TC-45	0.4	4400	32	12	2.1	0.008	M5	120	95	---	25	36	42	23	73	4
TC-50	0.55	4300	38	16	3.8	0.014	M5	133	100	79	32	46	43	27	92	4
TC-60	1.1	4000	48	16	5	0.041	M6	165	125	73	38	43	43	35	112	5
TC-70	1.72	3500	55	19	8	0.072	M6	195	144	82	45	50	10	42	132	5
TC-80	2.62	3100	65	25	12	0.147	M10	210	167	95	50	53	11	47	150	6
TC-85	3.21	2980	70	30	14	0.201	M12	220	180	103	52	54	14	48	154	6
TC-90	3.8	2880	76	30	15	0.255	M12	235	188	110	55	60	15	50	165	6
TC-100	5.3	2550	85	30	21	0.48	M12	255	215	124	60	61	15	58	178	6
TC-110	7.45	2250	90	30	28	0.64	M12	280	233	134	65	64	15	50	180	6
TC-120	12.1	2050	102	35	40	1.372	M12	315	265	152	75	70	15	55	205	6

Date: 4/4/20

Regd Office Works: 138, B.L.Saha Road Kolkata-700 053 (INDIA) Phone: 033-2403 9510 / 1326**E-Mail ID : techstarengineers@yahoo.co.in ; techstarpower@yahoo.com****Click on : www.techstarengg.com**